


Technical information

For Liniar tilt & turn windows



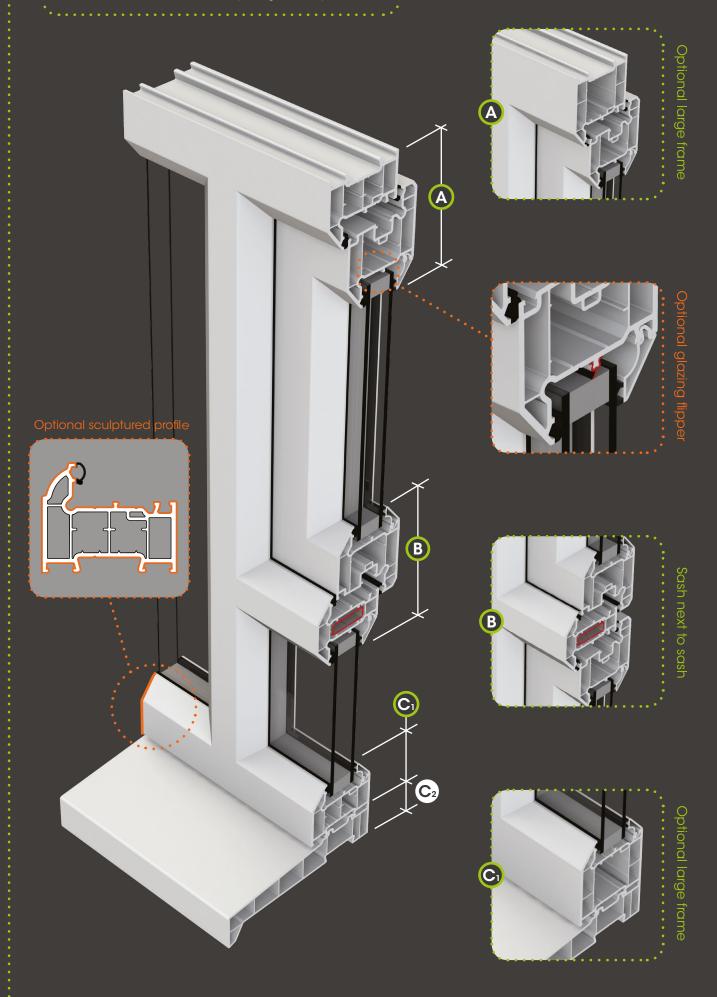

Tilt & Turn Window

- Sculptured and chamfered suites
- 28mm double and 36mm triple glazing
- Ideal for fire exits
- U-values from 1.3 (DGU) and 0.9 (TGU)
- Patented co-ex gasket

Accreditations











ISO 9001

Colour Options












Chartwell Green














7016 Grey

Additional colours are available to order as specials. The colours shown in this brochure give an indication only.



Product	Dim. A
Small frame & sash L#W011 & L#W035	lllmm
Large frame & sash L#W016 & L#W035	131mm

Product	Dim. B
Transom & sash L#W021 & L#W035	121mm
Int. transom & sash L#W026 & L#W035	141mm
Transom & 2 x sash L#W021 & 2 x L#W035	175mm
Int. transom & 2 x sash L#W026 & 2 x L#W035	195mm

Product	Dim. C ₁
Small frame L#W011	57mm
Large frame L#W016	77mm

Product	Dim. C2
85, 150, 165, 180 cills LSL085, LSL150, LCL165, LSL180	30mm

[#] Replace notation with (S) for sculptured suite and (C) for chamfered suite.

Liniar specification guide

The Liniar Specification Guide is an A4-size, 234-page, full colour guide to specifying energy efficient PVCu windows and doors.

Covering the full range of lead-free Liniar products including tilt and turn windows, the Specification Guide includes full product charts, U-values, dimensions, accreditations, safety information and a variety of case studies.

To view an online copy of the Liniar Specification Guide and to order your free copy visit :

www.liniar.co.uk/specification-guide

Flamstead House Denby Hall Business Park Denby Derbyshire DE5 8JX Tel: +44 (0)1332 883900 Fax: +44 (0)1332 883901 Email: sales@liniar.co.uk

